


ANKER SA SPOLJNIM NAVOJEM I ELASTIČNIM PRSTENOM

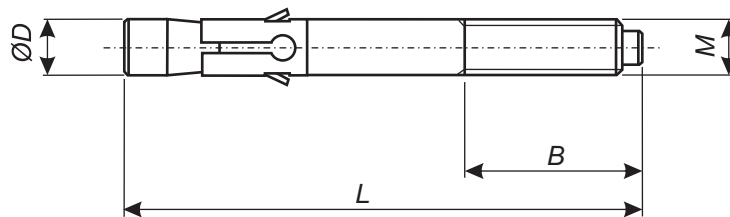

<i>M x L</i>	<i>Ø D</i>	<i>L</i>	<i>B min</i>	<i>F min</i>	<i>S min</i>	<i>N max</i>
M6x60	6	60	60	7,5	50	5
M6x85	6	85	60	7,5	50	30
M8x70	8	70	65	9,5	55	5
M8x80	8	80	65	9,5	55	15
M8x120	8	120	65	9,5	55	55
M10x80	10	80	70	12	60	10
M10x90	10	90	70	12	60	20
M10x110	10	110	70	12	60	40
M12x115	12	115	90	14	82	20
M12x145	12	145	90	14	82	50
M12x180	12	180	90	14	82	85
M16x135	16	135	110	18	100	20
M16x165	16	165	110	18	100	50
M16x250	16	250	110	18	100	95
M20x150	20	150	115	22	100	30
M20x210	20	210	115	22	100	90

Maximalna tolerancija izbušene rupe $\text{Ø}D$

$\text{Ø}6 / 8 / 10 = + 0,3 \text{ mm}$

$\text{Ø}12/16/20 = + 0,4 \text{ mm}$

